



**Self-service hotel without automation  
- installation instructions**

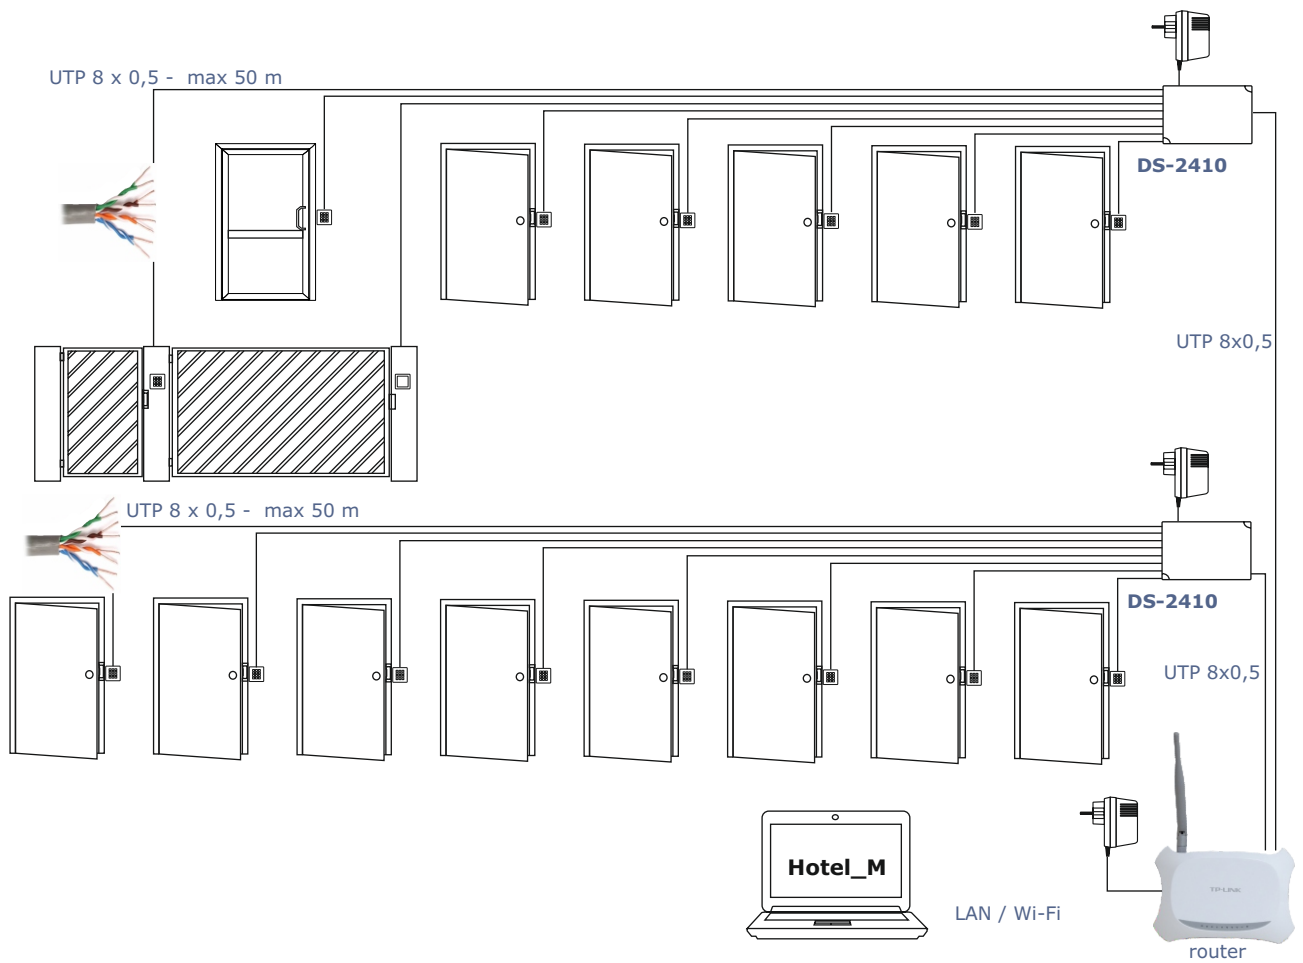


The door must be fitted with NC electric strike  
 (closed without voltage connected)  
 From the outside, the door should have a knob,  
 on the inside of the door handle.  
 This solution ensures evacuation in the event of a fire  
 and you don't have to use emergency buttons.  
 We recommend leaving the locks with a key opening.  
 In an emergency (no 230V voltage)  
 it will be possible to open the door with a key.

**hotel room without automation (B) or entrance (W)**

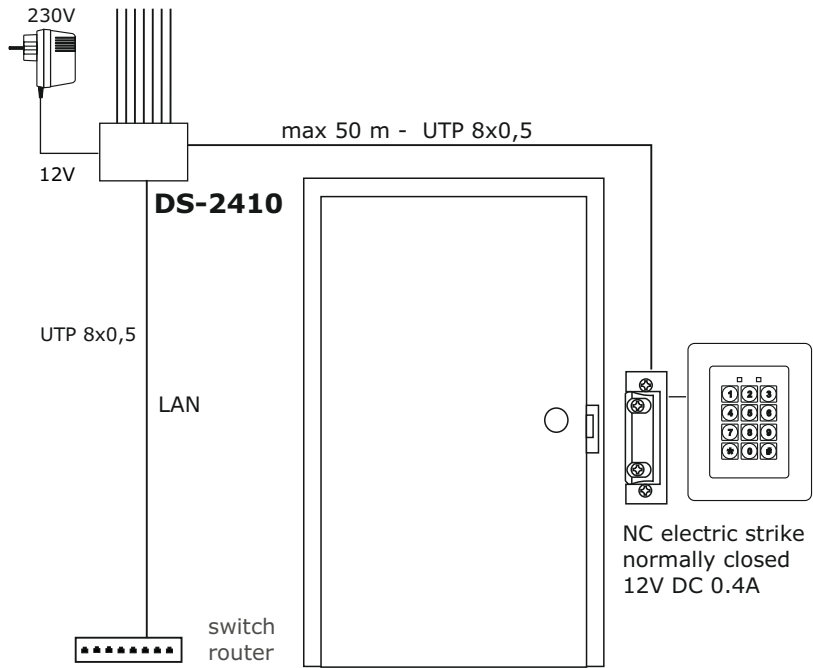


**GS-280K**

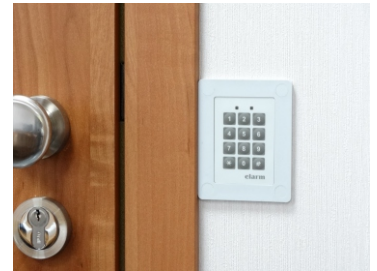

**GS-270K**



**other doors only open with card (P)**

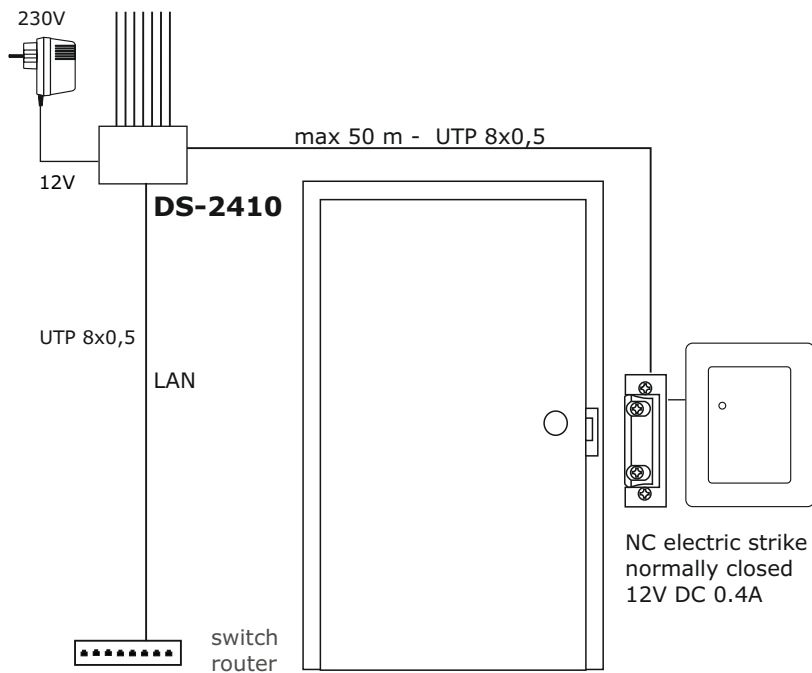

**GS-280**




**GS-270**



the door from the outside should have a fixed knob, from the inside the handle

**RESERVE POWER SUPPLY**


All devices can be connected to a UPS with a battery. The system will work after switching off 230V.

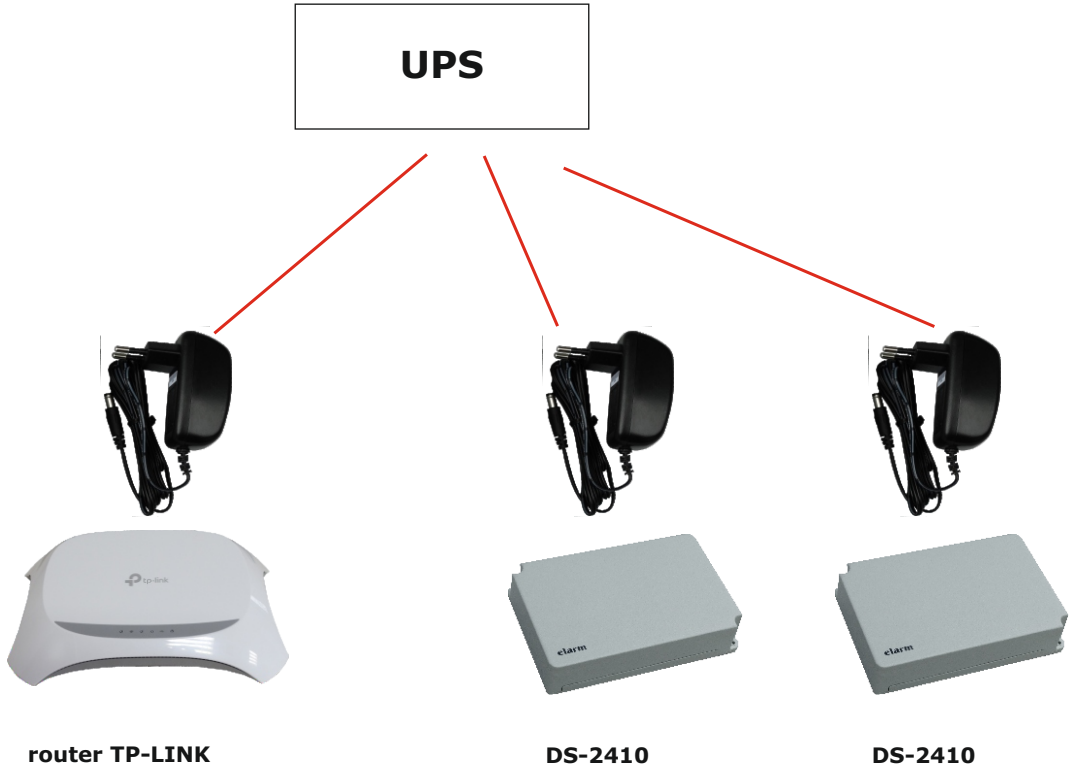




Program "Hotel\_M" version for Windows 10


**DS-2410 controller with power supply**

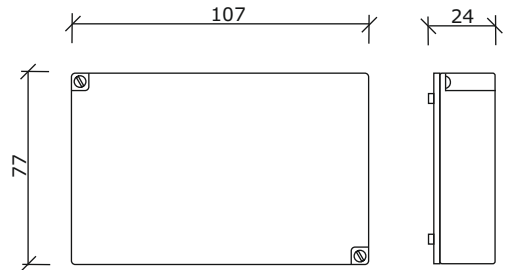


**GS-280K installation under plaster**

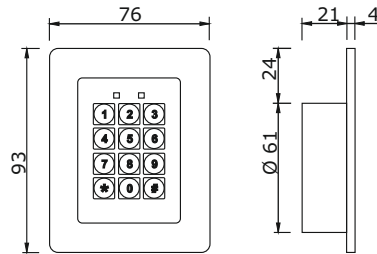

**GS-270K installation on plaster**



**NC electric strike (normally closed) 12V DC 0.4A**

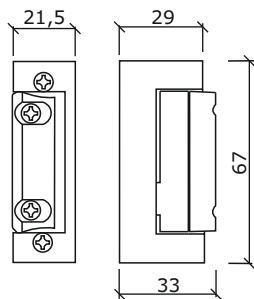

**router TP-LINK**





The controller packaging contains a test card.

It is entered into the controller's memory with permission to open all 8 doors.  
Please connect a test card to each GS controller after connecting it  
If the cables are connected correctly, the passage should open.



This way you can check the entire installation without a computer.

After starting Hotel\_M, please select the Configuration function  
and after connecting to the controller click the Delete cards button



The test card number will be deleted from the controller memory.

---

# GS-280K / GS-270K

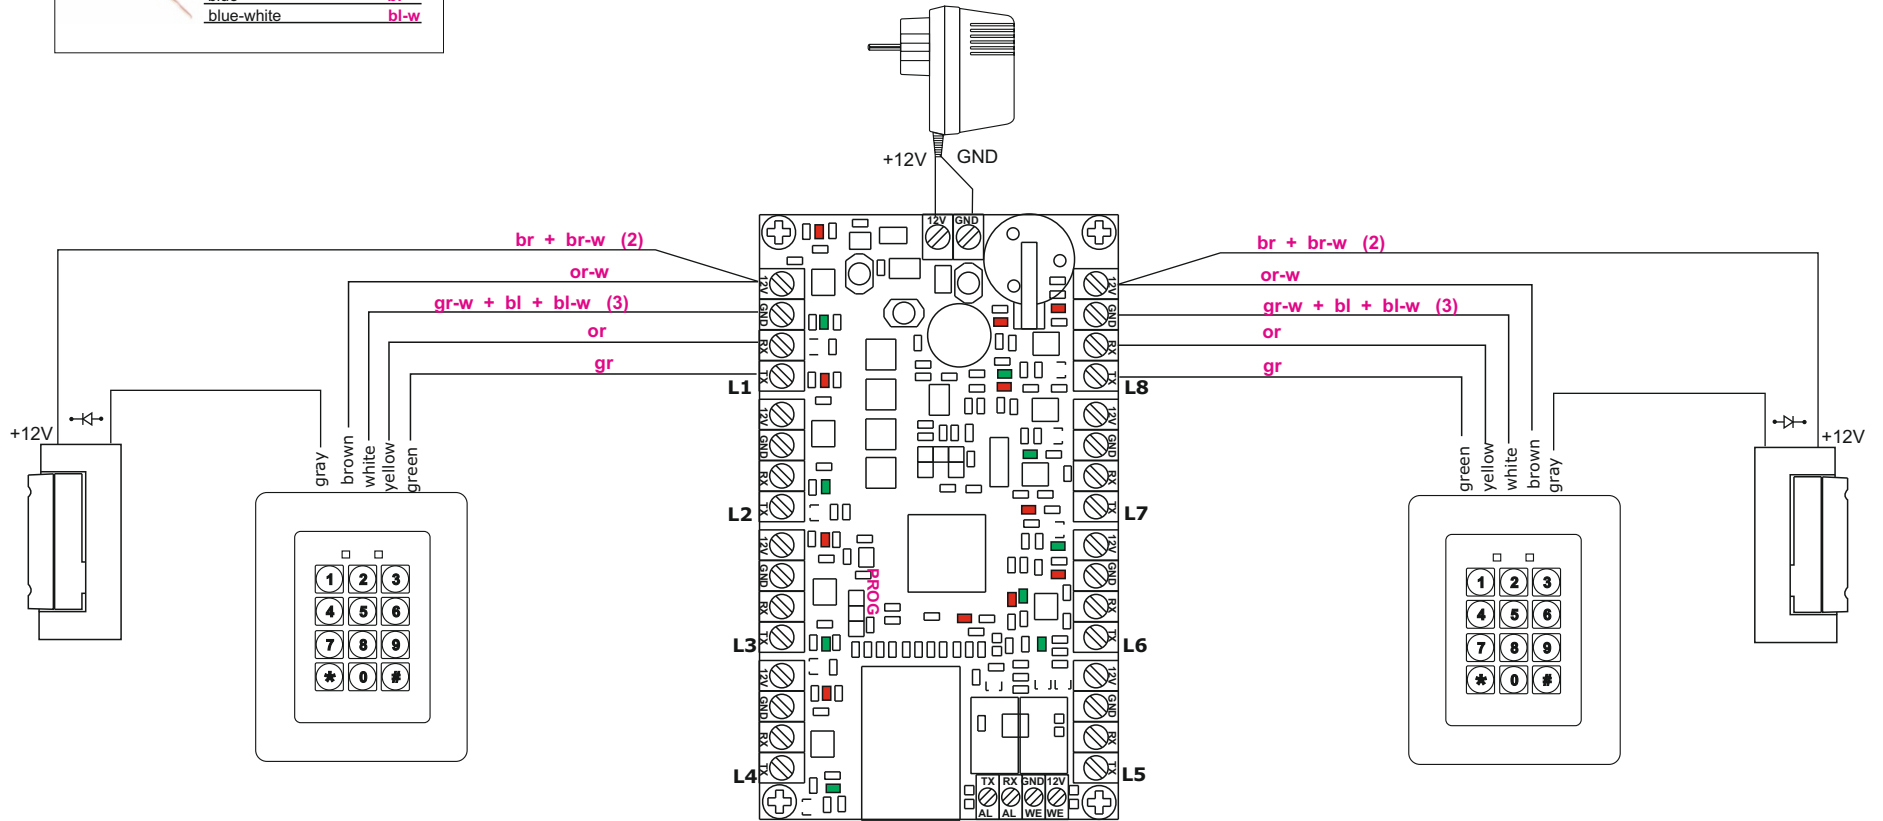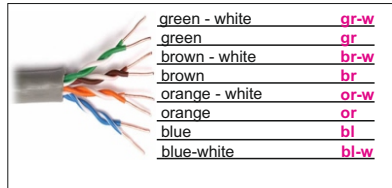

# BUILDING ENTRY DOORS GS-280K / GS-270K

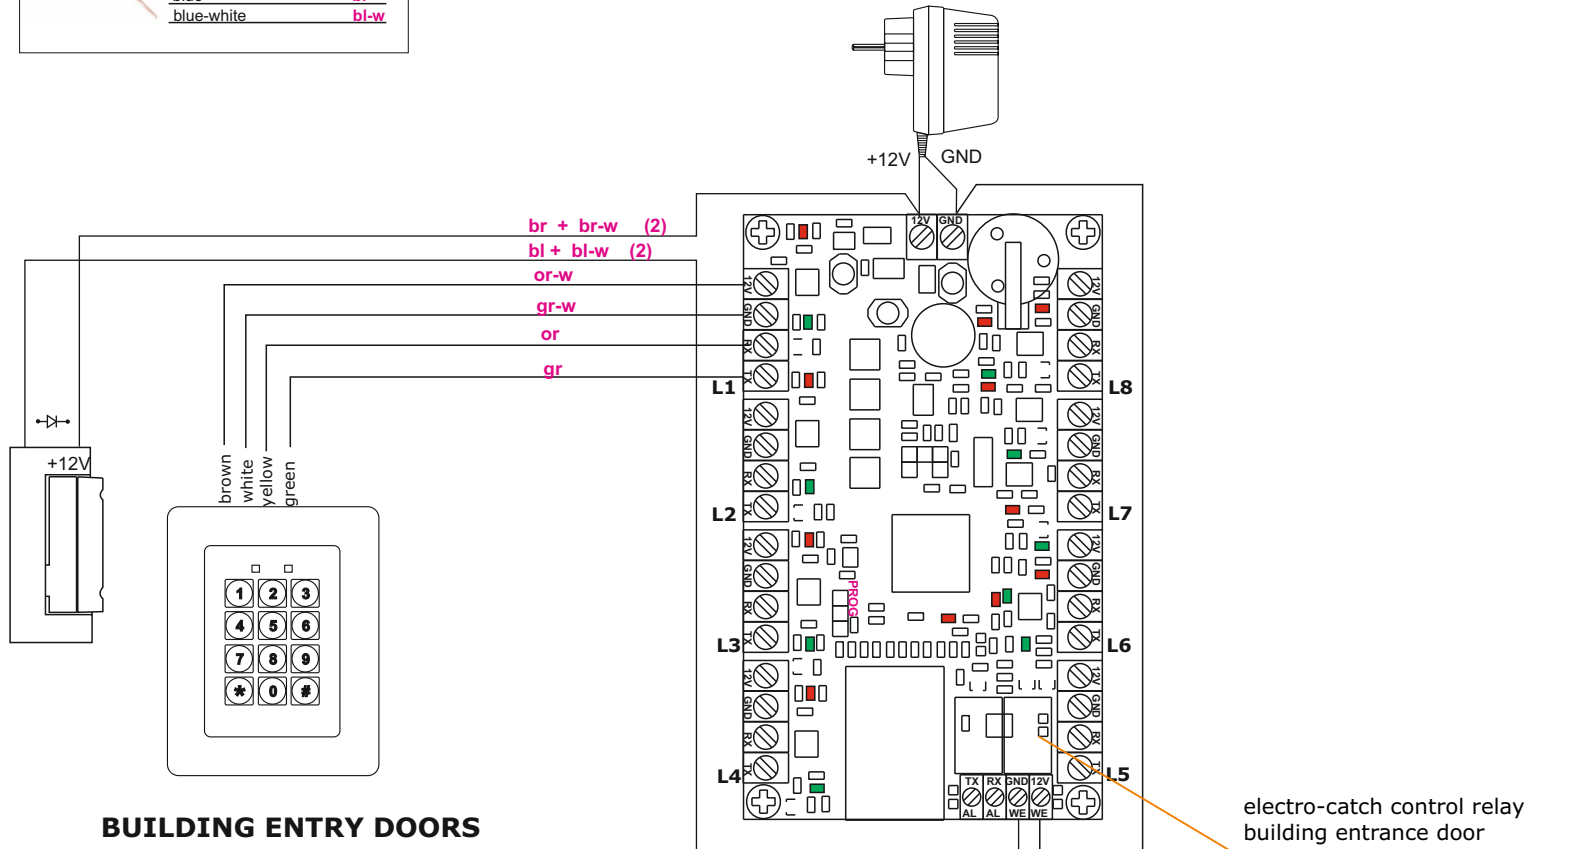
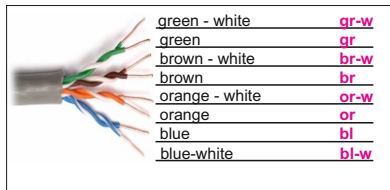


**BUILDING ENTRY DOORS**


the connection shown in the drawing can be used when connecting the entrance door this will increase the security of the installation the door will not open even if the reader is completely destroyed



**GS-280 / GS-270**

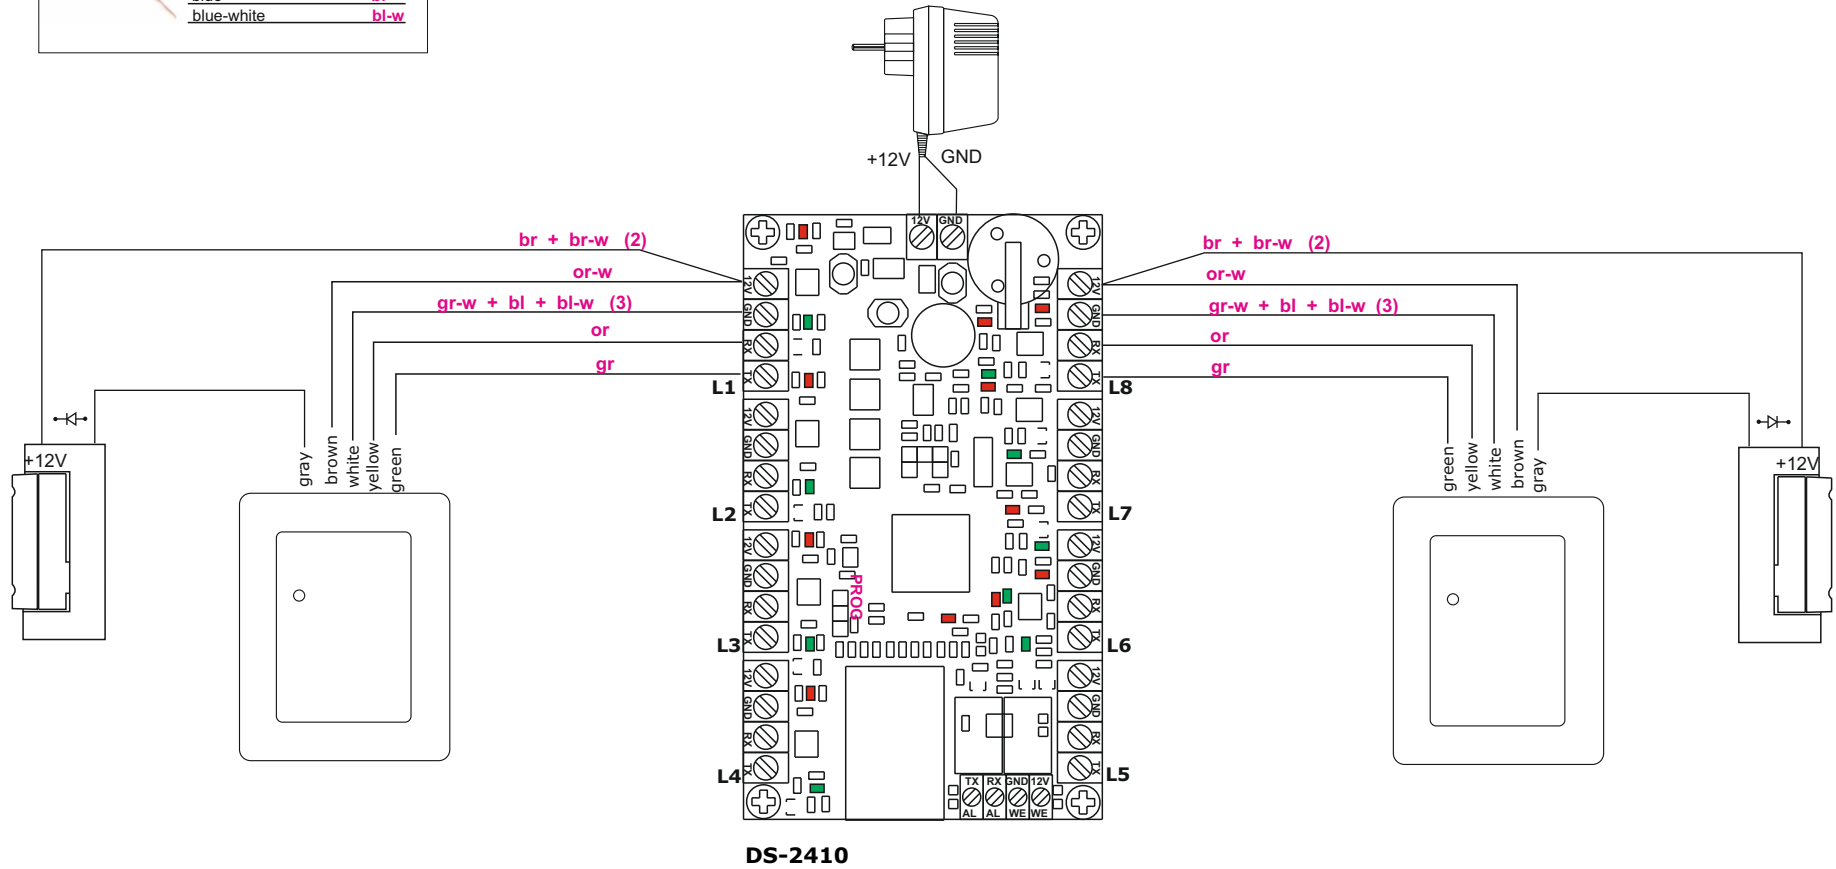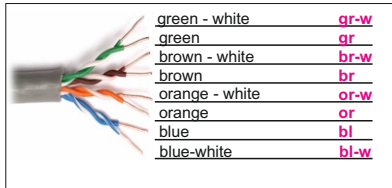

2 wires connected and close to the test card

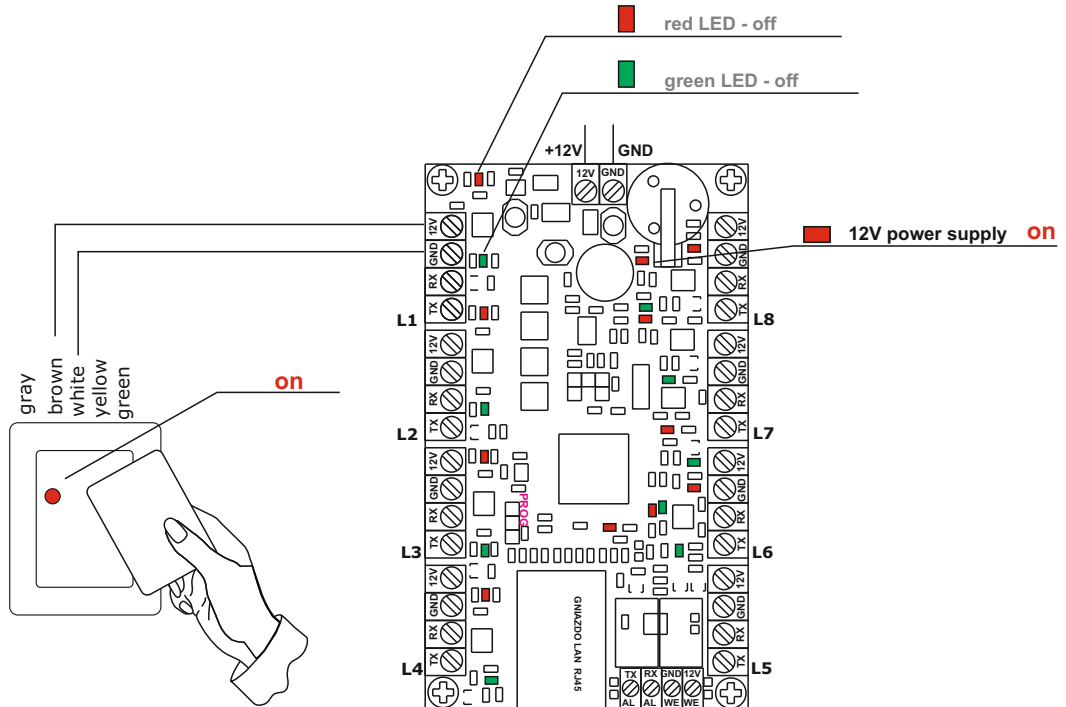

4 wires connected and close-up of a test card

